

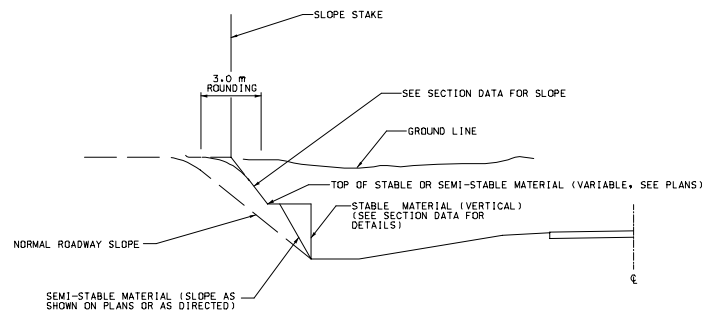


EXCAVATION PAY LIMITS

EMBANKMENT LIMITS

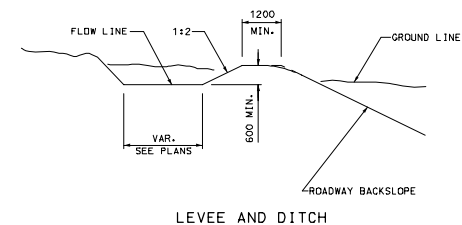


BACKSLOPES IN STABLE AND SEMI-STABLE MATERIAL

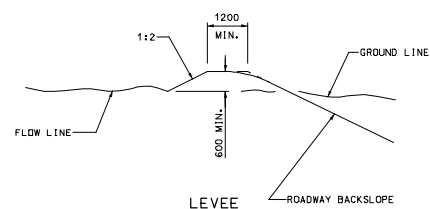


LEVEE AND/OR DITCH MAY BE LOCATED BACK OF BACKSLOPE WHEN CONDITIONS REQUIRE. USE DITCH ONLY WHERE INDICATED OR WHERE REQUIRED FOR DRAINAGE.

INTERCEPTION DITCH AND/OR LEVEE

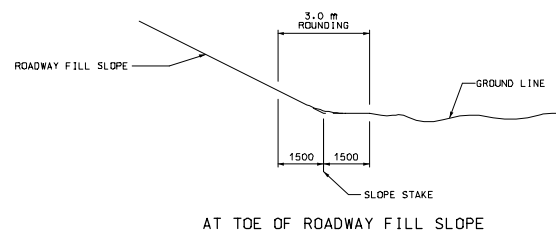

AT TOE OF ROADWAY FILL SLOPE

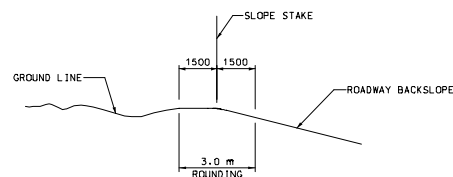

AT TOP OF ROADWAY BACKSLOPES

PARABOLIC ROUNDING

GENERAL NOTES:

ALL DIMENSIONS SHOWN ARE IN mm UNLESS NOTED.

SUBSURFACE LOSS OF MATERIALS OBTAINED DURING THE SOIL SURVEY FOR THE PURPOSE OF CUT CLASSIFICATION MAY BE ACQUIRED FROM THE DISTRICT OFFICE UPON REQUEST.

MISSOURI HIGHWAY AND TRANSPORTATION COMMISSION			
EXCAVATION AND EMBANKMENT			
TYPICAL DETAILS			
DATE: _____	EFFECTIVE: 02-01-1995	M203.00E	1/1